




DI CARDS (B)

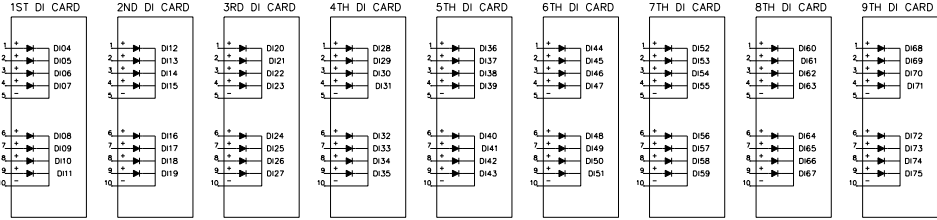


DO CARDS (C)

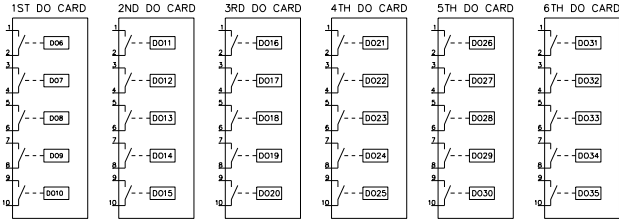


ARC PROTECTION (D)




RTD CARDS (F)




HSO CARDS (R)





mA OUTPUT (I)

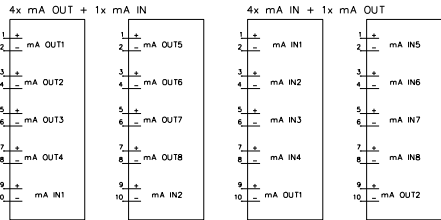

mA INPUT (T)



COMMUNICATION CARDS

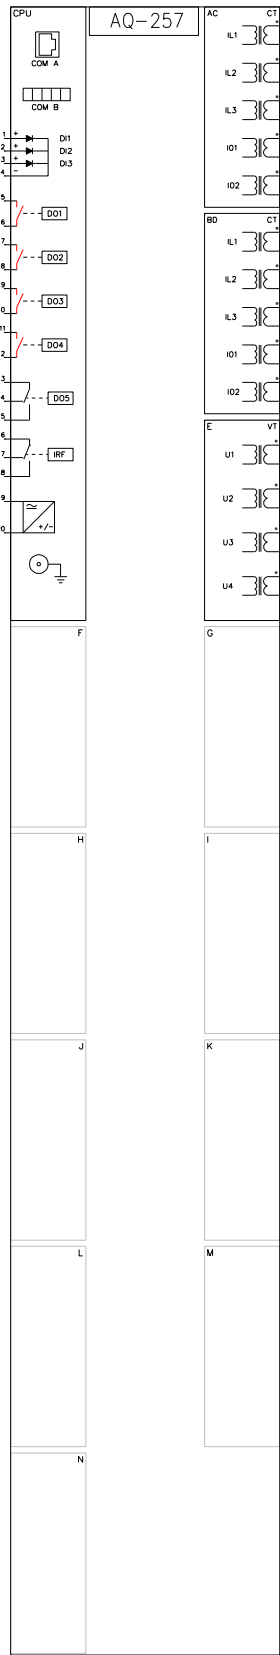

To keep the DI signal numbering correct (DI4...11 -> DI12...19 etc.) drag the cards starting from the first.

To keep the DO signal numbering correct (DO6...10 -> DO11...15 etc.) drag the cards starting from the first. MAX 6 pcs per device.


Arc protection:
MAX 1 per device.
Takes 1 option card slot.

HSO:
MAX 3 per device.
Takes 1 option card slot
Connections in device manual


Milliampere output (I) & input (T) cards.
Takes 1 option card slot
MAX 2 cards per device.
Connections in device manual

Communication cards.
Takes 1 option card slot
MAX 1 card per device, except SFP card.
Connections in device manual


DI CARDS (B)

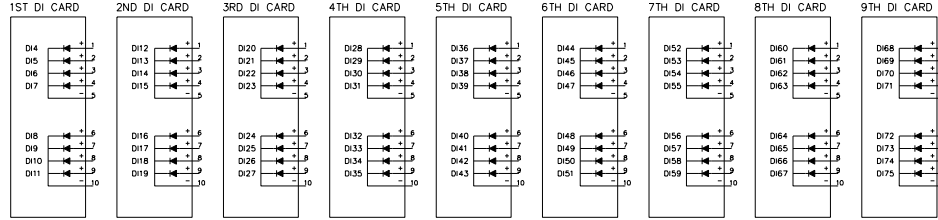

DO CARDS (C)

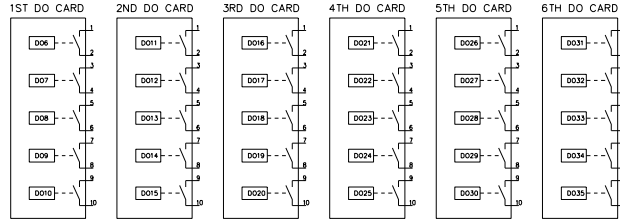


ARC PROTECTION (D)




RTD & Thermocoupler:
Channels 1-8
Takes 1 option card slot
MAX 2 cards per device.
Connections in device manual


RTD CARDS (F)




HSO CARDS (R)




mA OUTPUT (I)

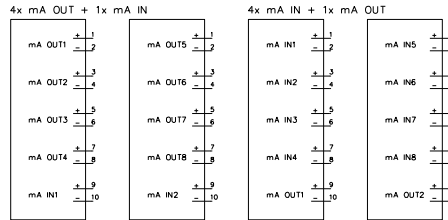

mA INPUT (T)



COMMUNICATION CARDS

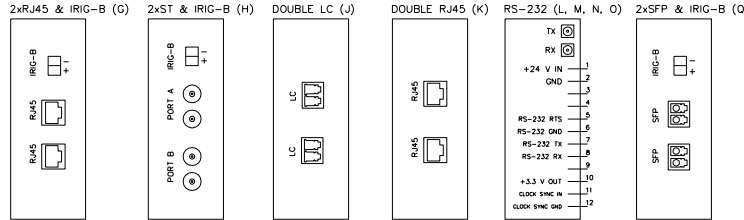

MAX 4 PER DEVICE